

Manual

Device overview on the web (GridVis Energy)



Table of Contents

- 1 OPEN THE DEVICE OVERVIEW.....2
- 2 ADD DEVICES3
- 3 MANAGE DEVICE LISTS.....5
- 4 CONFIGURE THE TEMPLATE (DASHBOARD)..... 10
- 5 OPEN THE DEVICE CONFIGURATION 12
- 6 FILTER LISTS 13
- 7 MANAGE COLUMNS..... 14
- 8 SUMMARY 16

This tutorial explains the basic functions of the new device overview on the web.

Contents

- ▪ Open device overview
- ▪ Add devices to the list
- ▪ Organize lists
- ▪ Perform device actions
- ▪ Filter the list
- ▪ Manage columns

As of version 7.4.60, the device overview of the GridVis Energy web interface has been completely revised. For devices which support web configuration (e.g. UMG 801 and UMG 96 PA), you can also open this via the device lists.

The screenshot shows the 'Übersicht' (Overview) page in the Janitza GridVis-ENERGY web interface. The page displays a list of devices under the 'Testgeräte' folder. The table has columns for 'Icon', 'Name und Beschreibung', 'IP Adresse', 'S/N', and 'Typ'. The devices listed are:

Icon	Name und Beschreibung	IP Adresse	S/N	Typ
	Gerät-3	--	--	UMG 801
	Gerät-3 / Basisgerät UMG801 Basisgerät	--	--	UMG801 Basis...
	UMG 512 - TD UMG 512 - TD Testgerät	192.168.3.198	4200-0053	UMG 512
	Gerät-2	192.168.3.68	4300-0009 (M...	UMG 96-PA

At the bottom of the page, there is a footer with the website URL 'www.janitza.com' and the copyright notice '© Janitza electronics GmbH. Alle Rechte vorbehalten'.

1. The new device overview offers the option of creating several lists and organizing them in folders.
2. A selection of combinable filters allows you to temporarily reduce a list to specific devices.
3. Using the Columns menu of each list, you can adapt the displayed columns and change their order using drag & drop.


The device lists can be used to configure a link to a dashboard for each device and open it as well.

1 Open the device overview




1 Click **Overview**.

2 Add devices

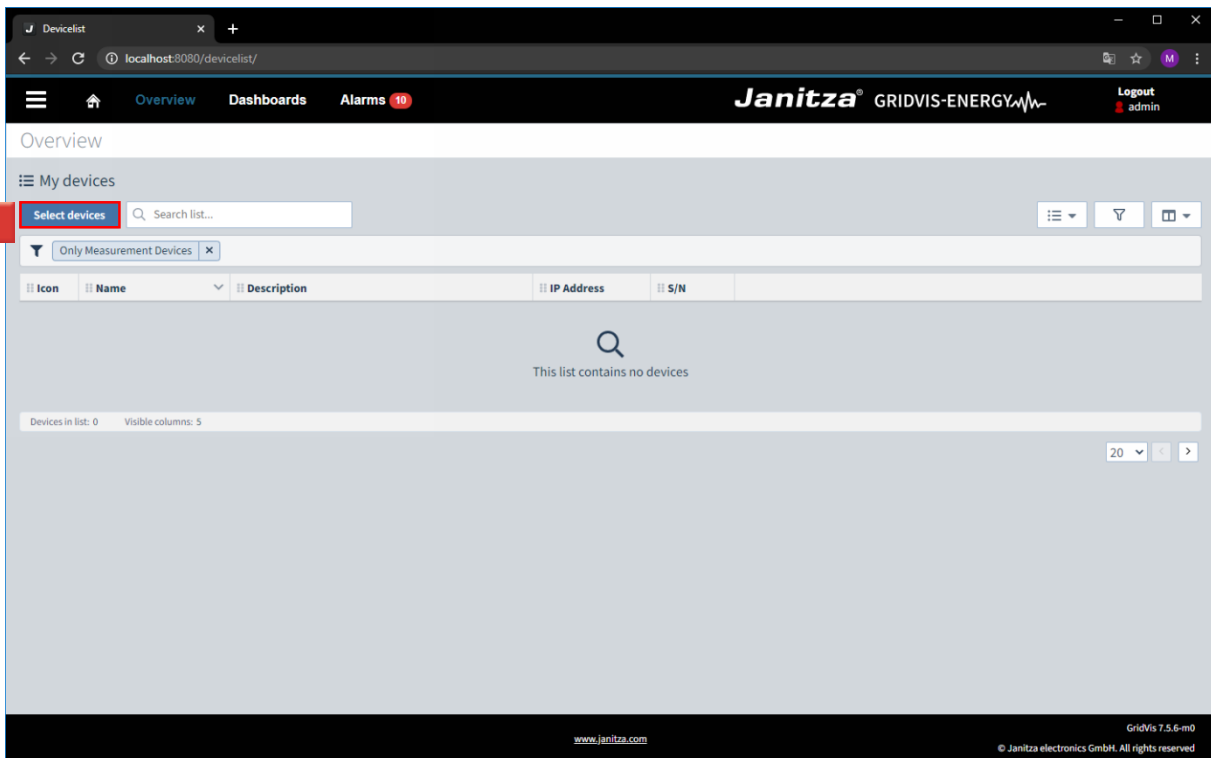

1 Click the **Select devices** button.

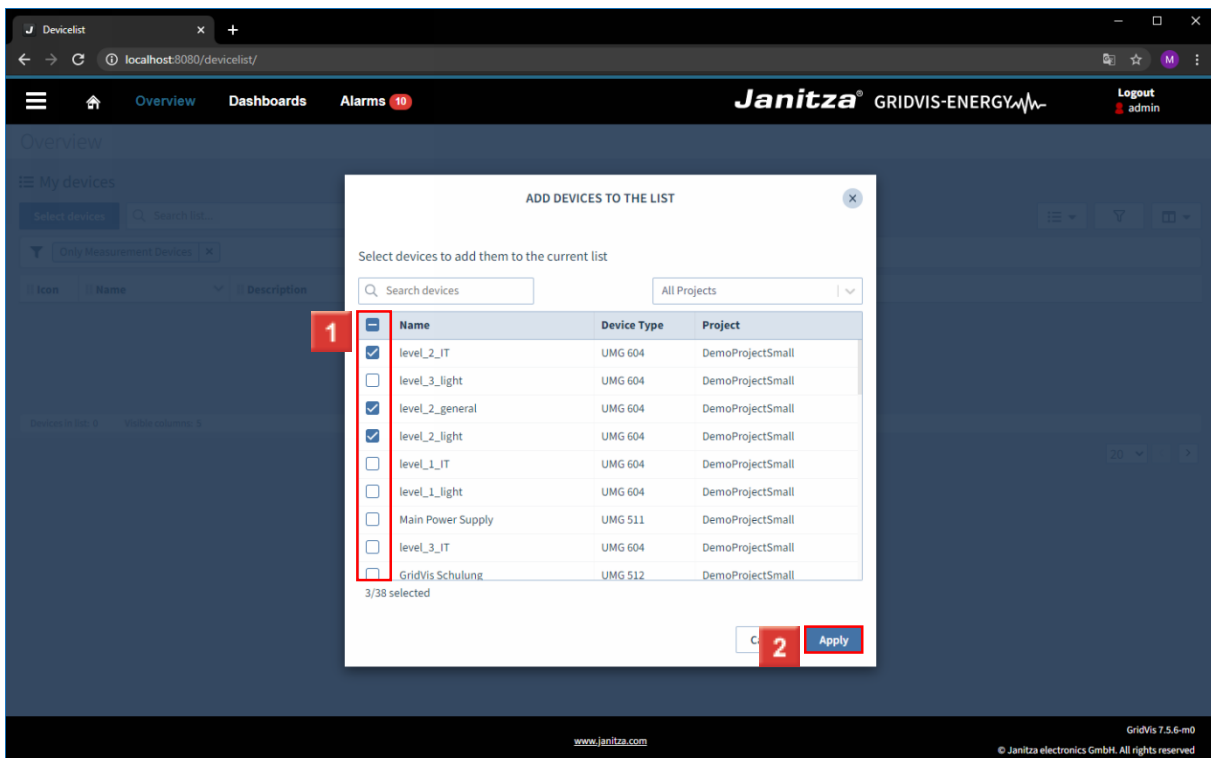

1 Use the checkboxes to select the devices to be added to the list.

i The device selection contains devices from all projects accessed by GridVis Energy.


i

i Optionally, you can also filter the list for specific projects.

2


Click the **Apply** button.

3 Manage device lists

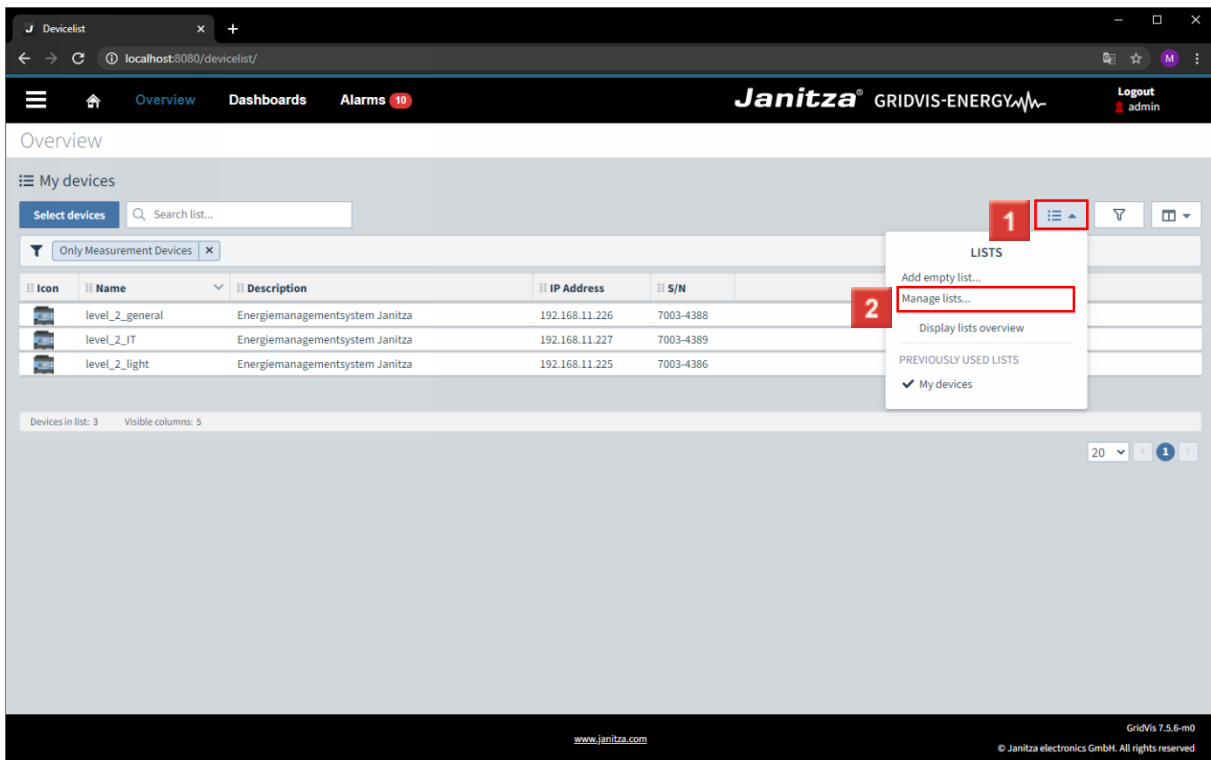



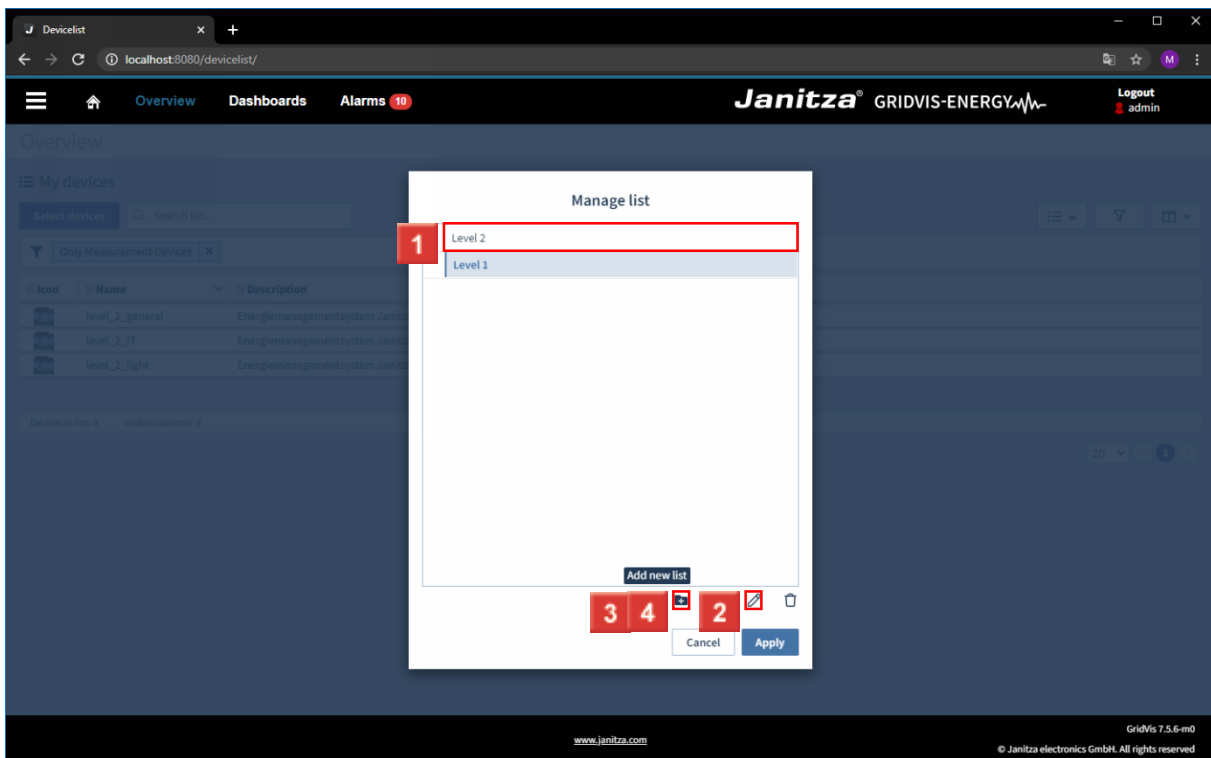

1 To create and name new lists and folders, click the **Lists** button.


2 Click **Manage lists**....




1 Click the **My devices** list item.

2 Click the **Rename selected list** button.

- 3 Enter **Level 2** and press .
- 4 Enter **Level 2** and press .
- 5 Click the **Add new list** button.
- 6 Enter a new name and press .
- 7 Enter a new name and press .
- 8 Click the **Add new Folder** button.

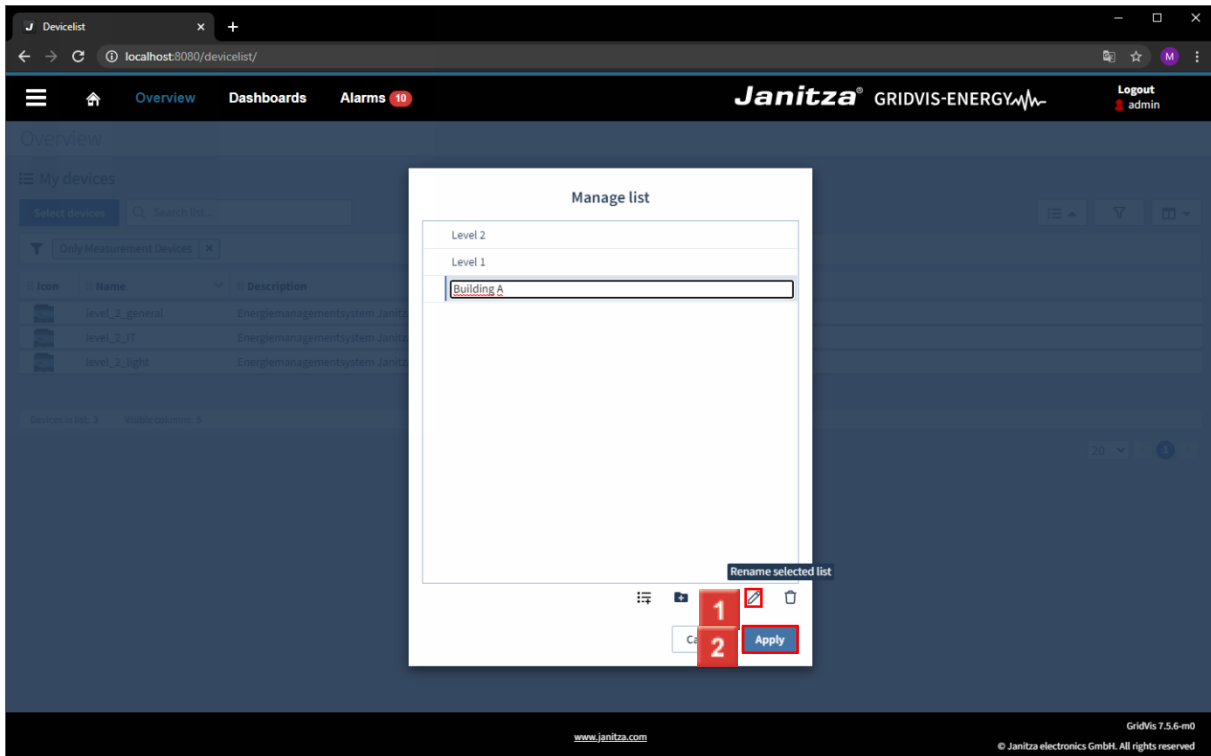


- 1 Click the **Rename selected list** button.
- 2 Enter a new name in the **folder name field**.
- 3 Click the **Apply** button.

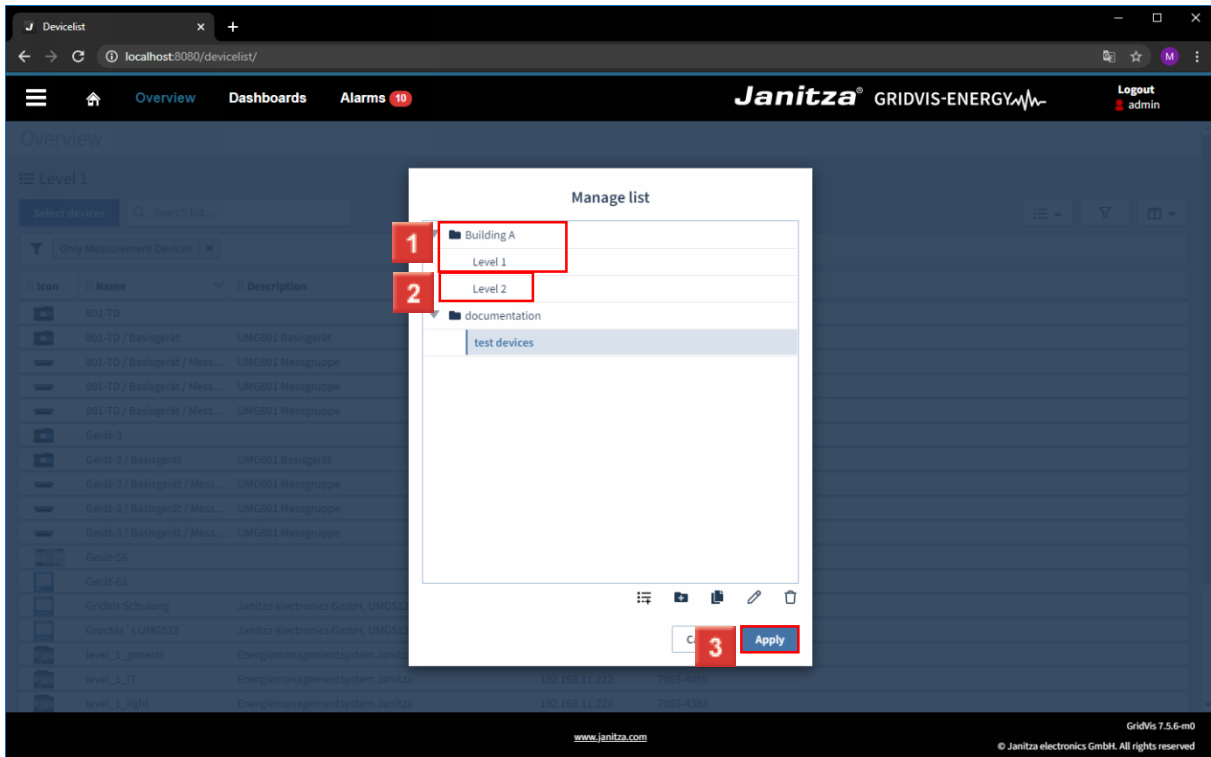


1 The lists can be moved to folders using drag & drop.

2 After you have created the desired lists and organized them into folders, click **Apply**.

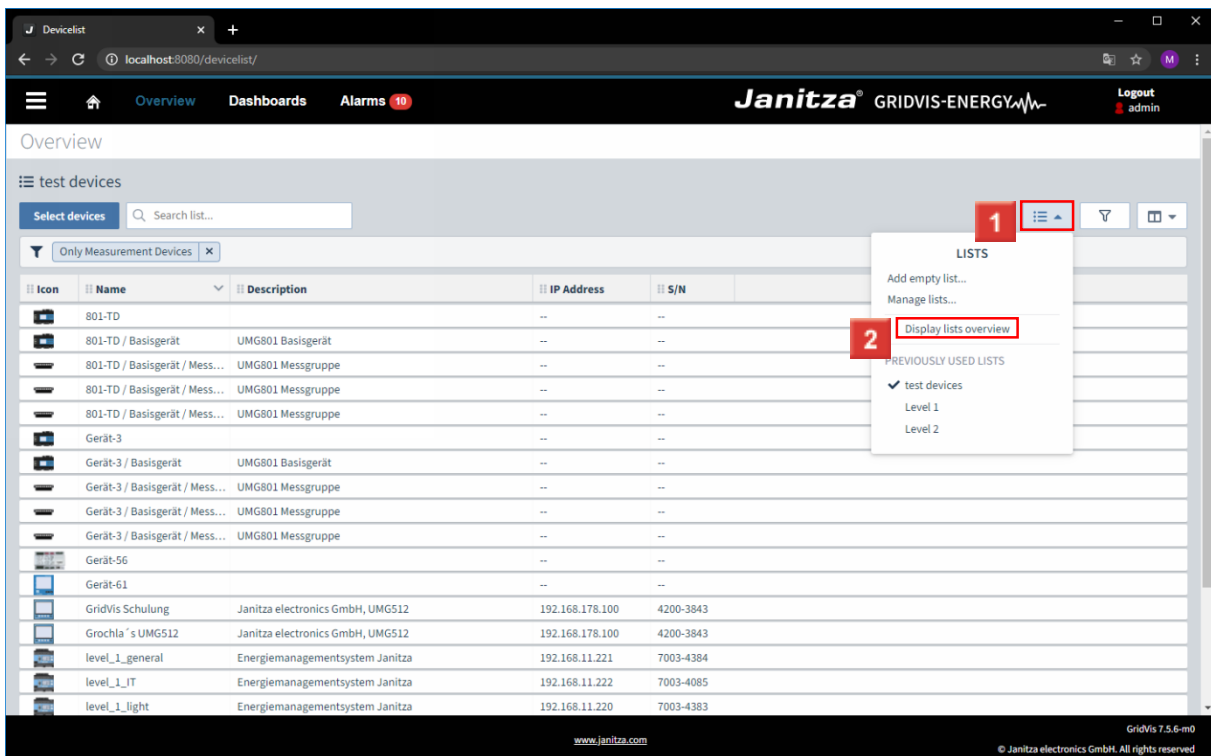


1 Click the **Lists** button.

2 Click on the list element **Display lists overview** to display an overview of your lists.

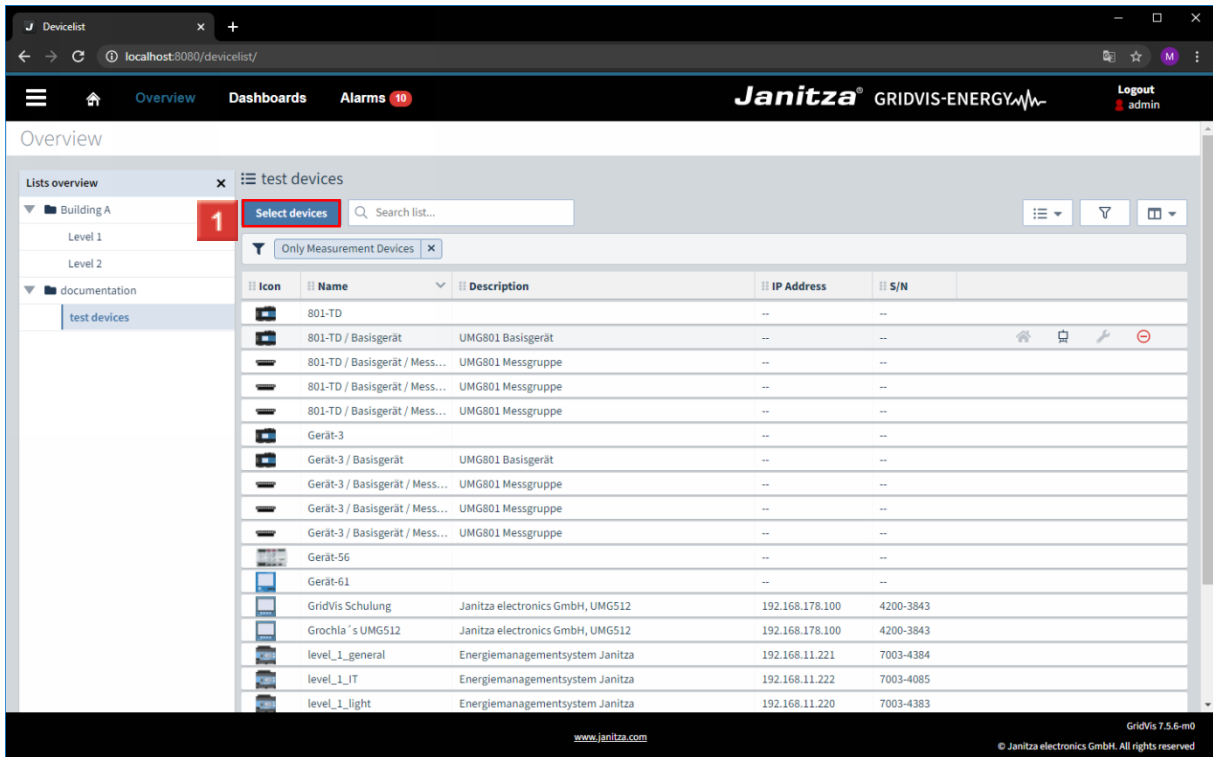

1 Click the **Select devices** button.

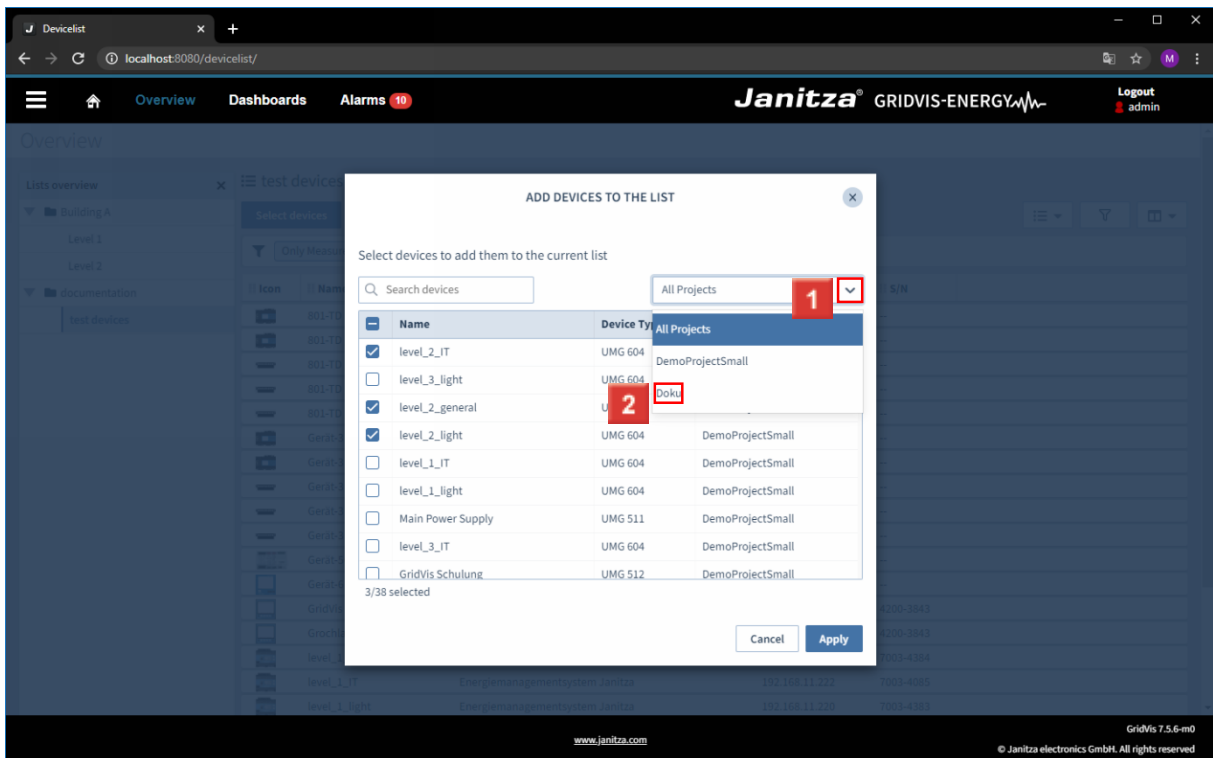

1 Click the **Projects** drop-down button to limit the selection to specific projects.

2 Click the **Doku** list item.

The screenshot shows the 'ADD DEVICES TO THE LIST' dialog box in the Janitza GridVis-ENERGY web interface. The dialog box has a search bar and a dropdown menu. Below is a table of devices with checkboxes for selection. A red box highlights the first four rows, and another red box highlights the 'Apply' button.

Name	Device Type	Project
<input checked="" type="checkbox"/> UMG 512 - TD	UMG 512	Doku
<input checked="" type="checkbox"/> UMG 96 PA Technische Doku	UMG 96-PA	Doku
<input checked="" type="checkbox"/> Gerät-3	UMG801	Doku
<input checked="" type="checkbox"/> Gerät-3 / Basisgerät	UMG801BaseModu	Doku
<input type="checkbox"/> Gerät-3 / Basisgerät / Messgruppe 1	UMG801 Measur	Doku
<input type="checkbox"/> Gerät-3 / Basisgerät / Messgruppe 2	UMG801 Measur	Doku
<input type="checkbox"/> Gerät-3 / Basisgerät / Messgruppe 3	UMG801 Measur	Doku

7/38 selected

Apply

1 Select the desired devices using the **checkboxes**.

2 Click the **Apply** button.


4 Configure the template (dashboard)

The screenshot shows the Janitza GridVis-ENERGY web interface. The main content area displays a table of devices under the heading 'test devices'. The table has columns for Icon, Name, Description, IP Address, and S/N. The third row, 'UMG 512 - TD', is highlighted, and a red box with the number '1' is placed over a button in its rightmost column. The interface also includes a sidebar with a 'Lists overview' section and a top navigation bar with 'Overview', 'Dashboards', and 'Alarms' (10) tabs.


Icon	Name	Description	IP Address	S/N
	Gerät-3		--	--
	Gerät-3 / Basisgerät	UMG801 Basisgerät	--	--
	UMG 512 - TD	UMG 512 - TD Testgerät	192.168.3.198	4200-0053
	UMG 96 PA Technische Doku	Testgerät für die technische Dokumentation	192.168.3.68	4300-0009 (M...

1 Click **Template configuration**.

- i** You can define a dashboard template link for each device in the list.
- i**
- i** You can open the stored dashboard template by clicking the button in the list.

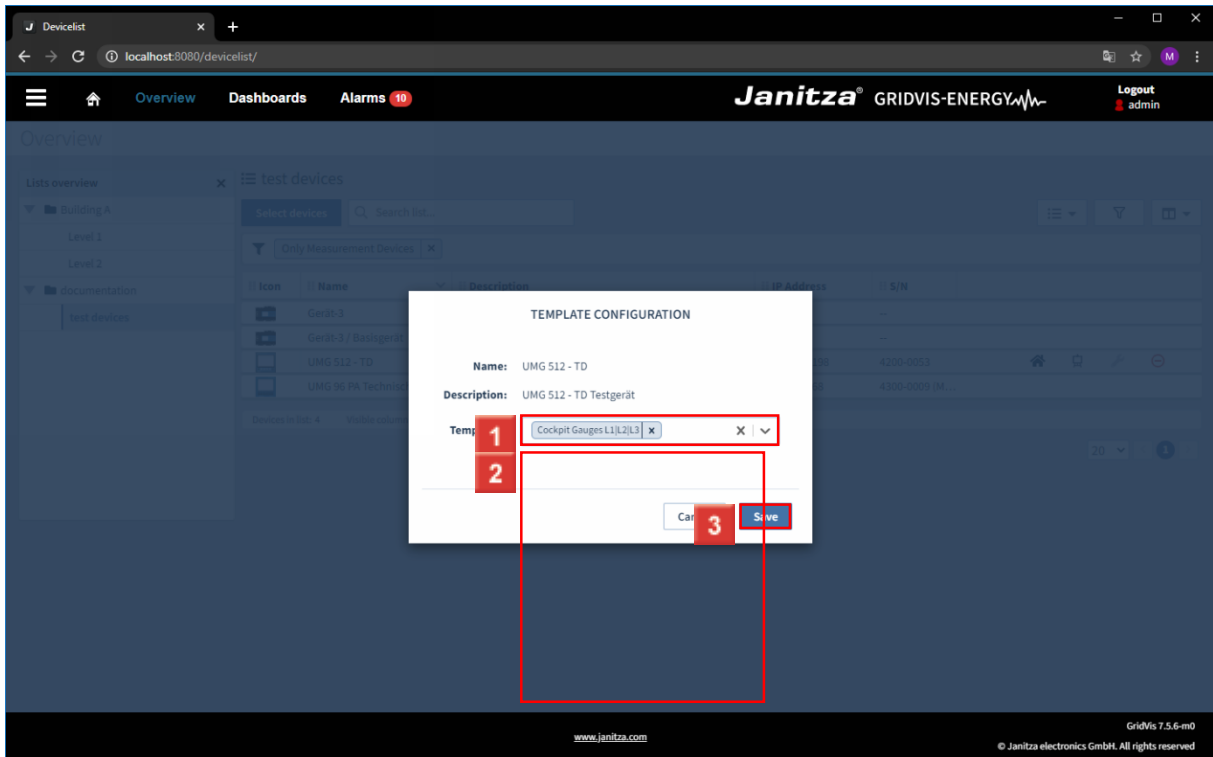

- 1** Click the **Select templates...** dropdown button.
- 2** Select the desired template from the list.
- 3** Click the **Save** button.

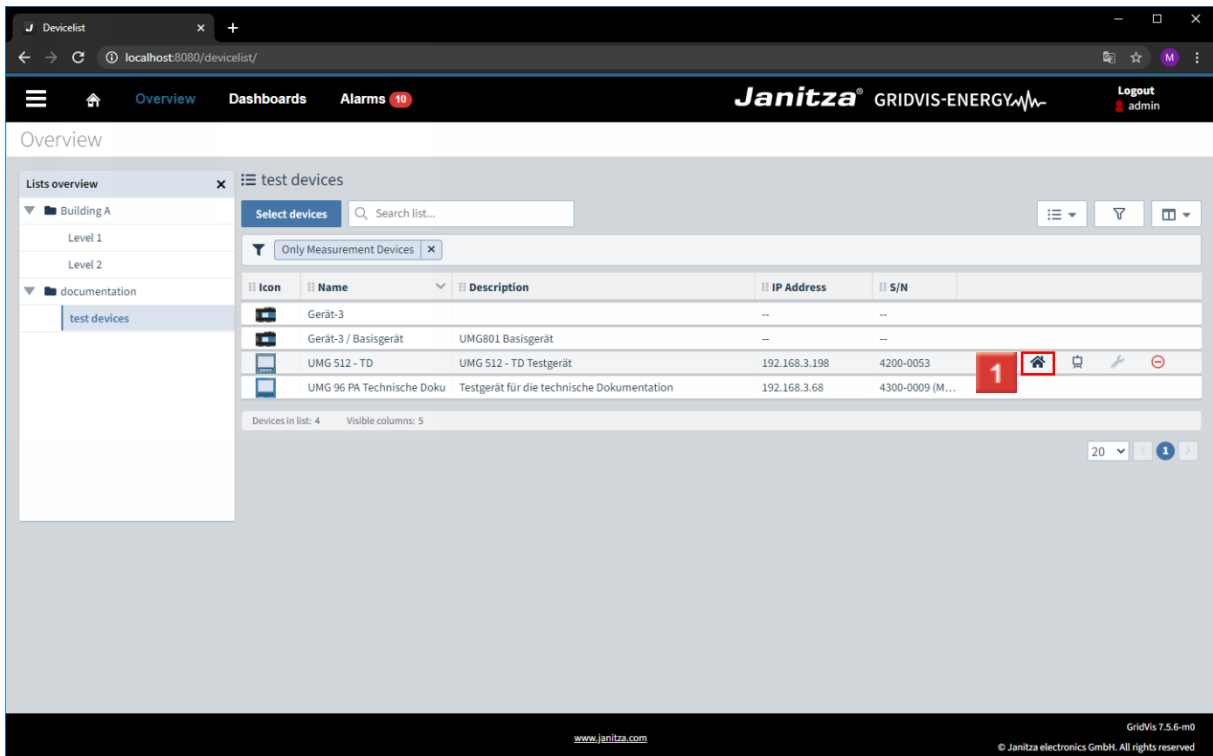

- 1** Click **Open link**.

5 Open the device configuration

The screenshot shows the 'Overview' page of the Janitza GridVis Energy web interface. On the left, there is a 'Lists overview' sidebar with a tree view containing 'Building A', 'Level 1', 'Level 2', 'documentation', and 'test devices'. The main area displays a table of devices under the heading 'test devices'. The table has columns for 'Icon', 'Name', 'Description', 'IP Address', and 'S/N'. The last row, 'UMG 96 PA Technische Doku', has a red box around a pencil icon labeled '1', indicating the device configuration button. The footer shows 'www.janitza.com' and 'GridVis 7.5.6-m0 © Janitza electronics GmbH. All rights reserved'.


1 To open the device configuration, click the **Device configuration** button.

i For devices that support configuration via GridVis Energy, use the button in the list to open the configuration.


The screenshot shows the 'Web Configuration' page for the device 'UMG 96 PA Technische Doku'. The top navigation bar includes 'Overview', 'Dashboards', and 'Alarms 10'. A red box highlights the 'Overview' link. The main content area shows device details like 'Basic Device UMG 96-PA', 'IP-Address 192.168.3.68', and 'Serial Number 4300-0009'. Below this is a 'Device configurator' section with tabs for 'General', 'Measurement', 'Recording', 'Periphery', and 'System'. The 'General' tab is active, showing an 'Identification' form with fields for 'Name of device' (filled with 'UMG 96 PA Technische Doku') and 'Description of device' (filled with 'Testgerät für die technische Dokumentation'). The footer shows 'www.janitza.com' and 'GridVis 7.5.6-m0 © Janitza electronics GmbH. All rights reserved'.

1 To navigate back to the device overview, click the **Overview** hyperlink.

6 Filter lists

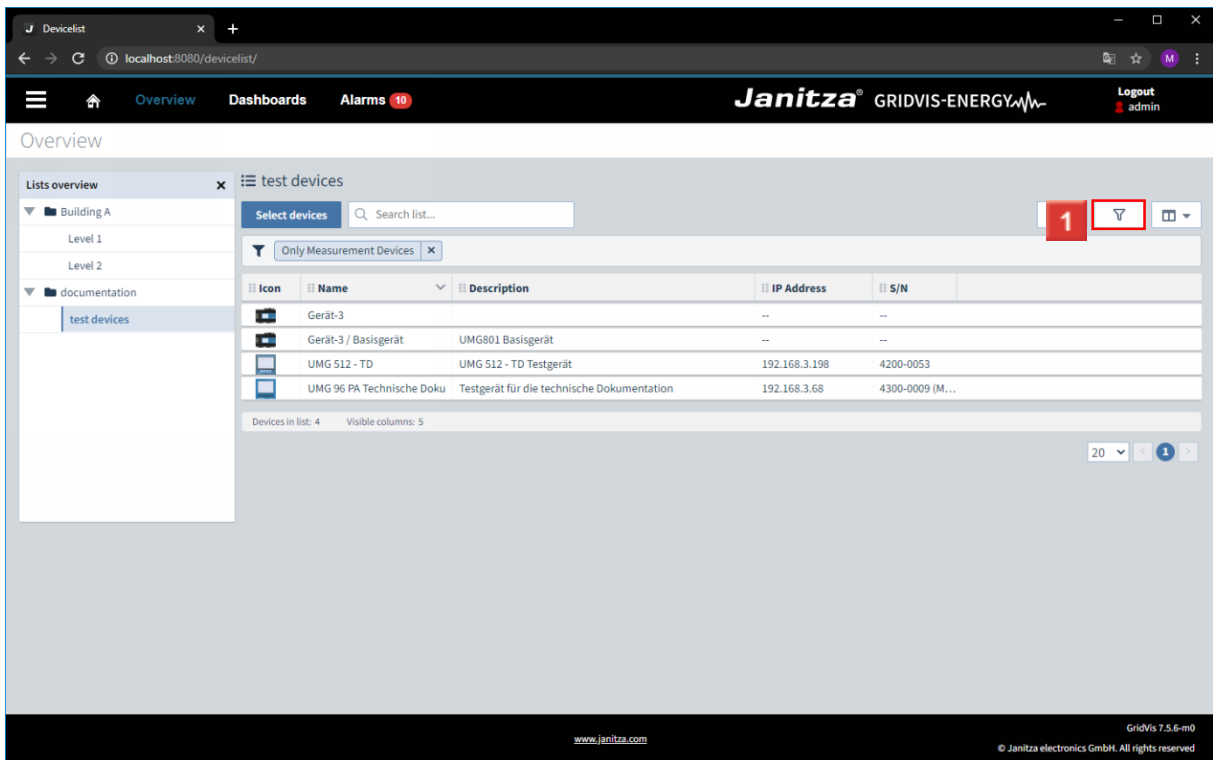


1 To filter the opened list, click the **Filter** menu button.

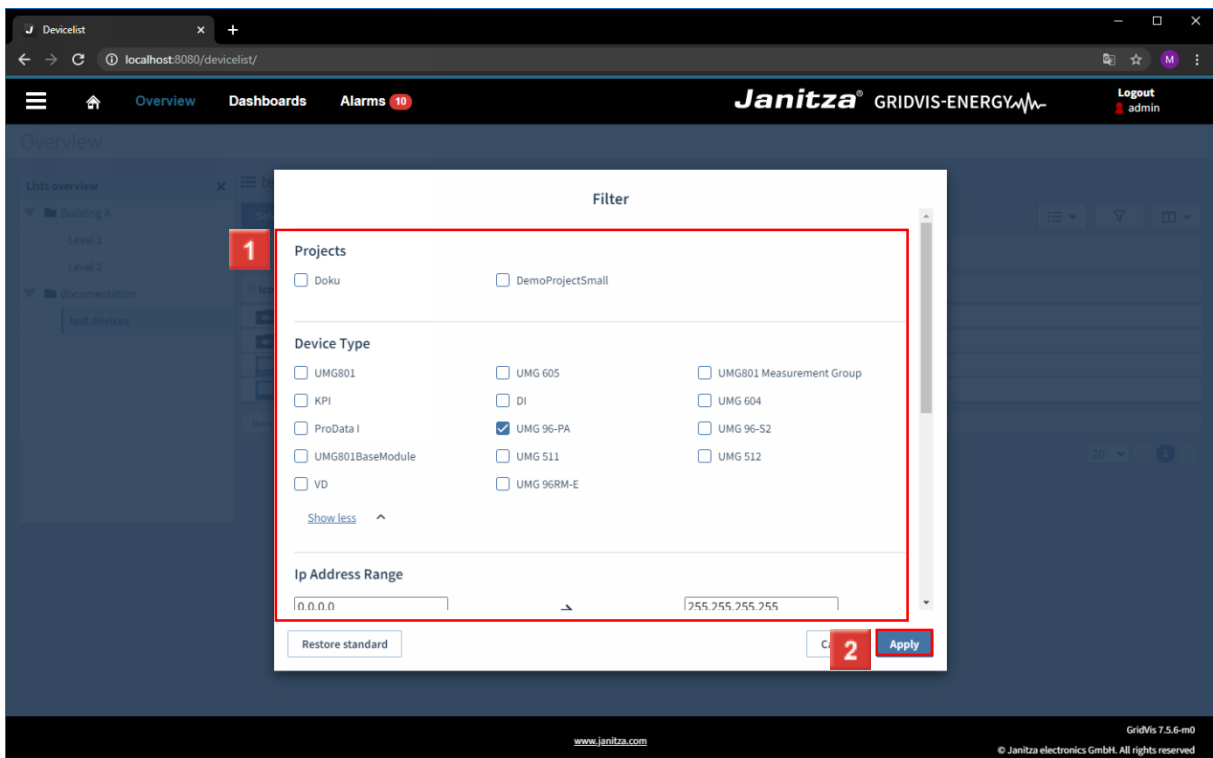

1 Select the desired filter.

2 Click the **Apply** button.

7 Manage columns

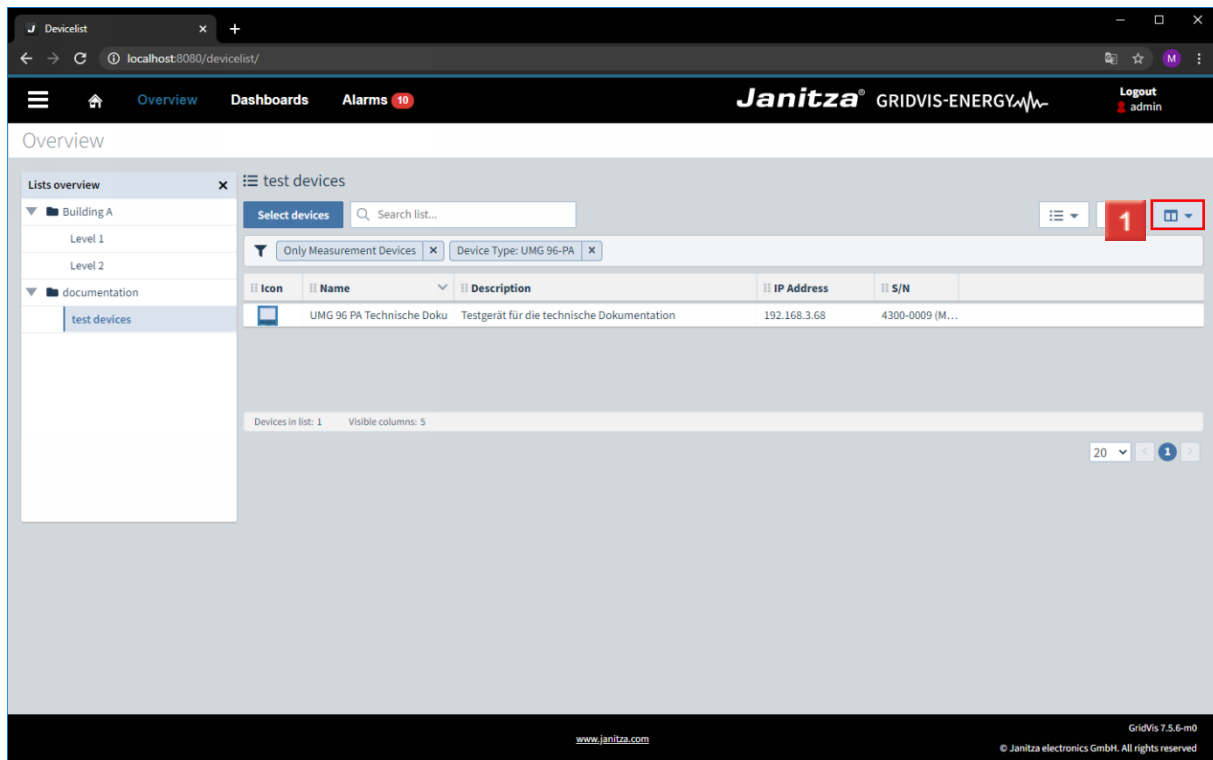

The screenshot shows the Janitza GridVis-ENERGY web interface. The main content area displays a list of devices under the heading 'test devices'. The list has columns for 'Icon', 'Name', 'Description', 'IP Address', and 'S/N'. A red box highlights the 'Columns' button in the top right corner of the list area. The interface also shows a sidebar with 'Lists overview' and a search bar.


Icon	Name	Description	IP Address	S/N
	UMG 96 PA Technische Doku	Testgerät für die technische Dokumentation	192.168.3.68	4300-0009 (M...

1 To manage the columns of the list, click the **Columns** button.

i Click on the filter name to temporarily deactivate the filter.


i

i Click on the remove symbol (x) to remove the Filter.

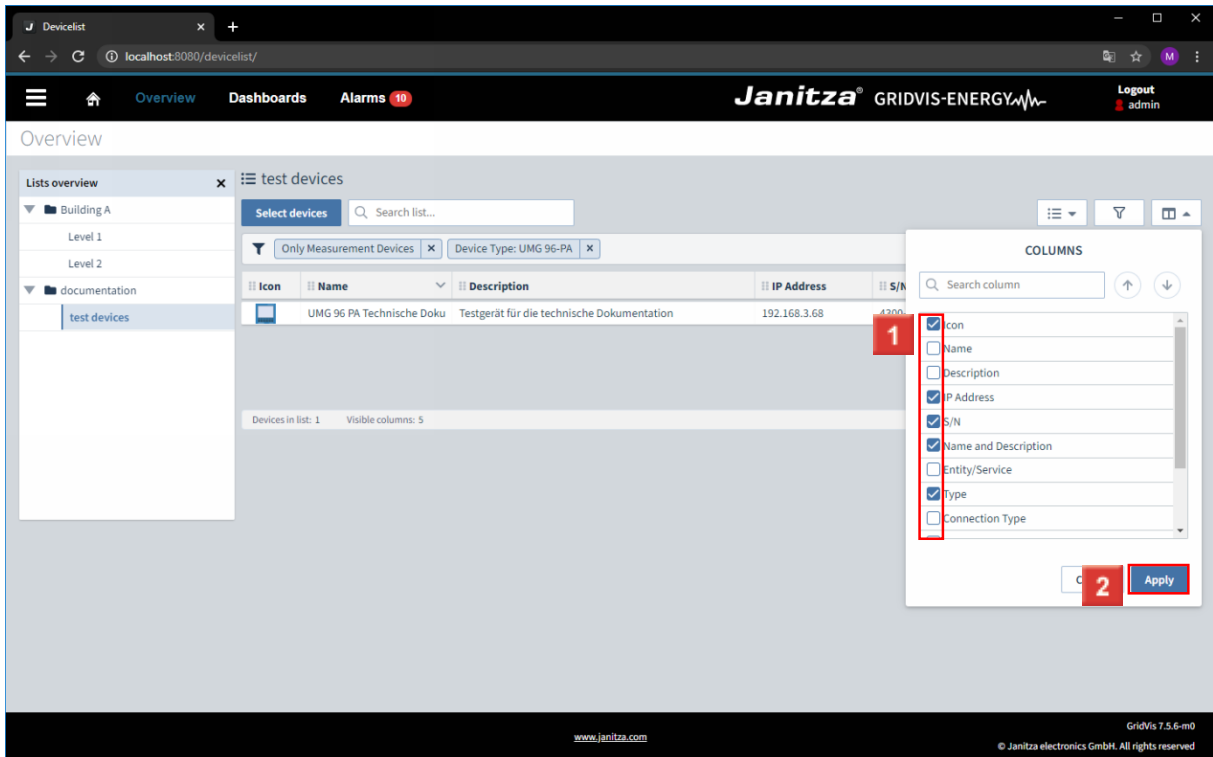

1 Use the checkboxes to select which columns should be included in the list.

2 Click the **Apply** button.

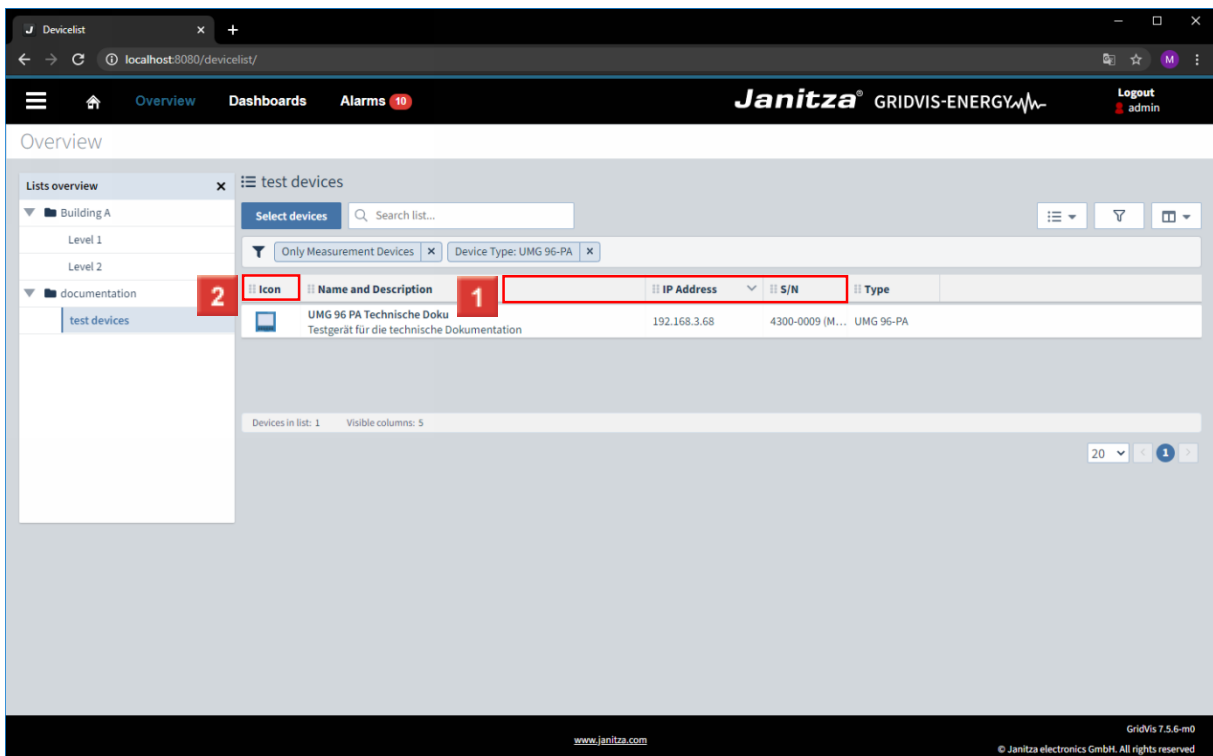

1 Use drag & drop to modify the column order.

8 Summary

Please enter your text here.

Manage lists

Optionally, you can display a list overview to see all your lists at a glance.

Organize your lists in folders and modify the structure using drag & drop.

Manage columns

Use the *Columns* menu to select which of the available columns should be displayed in the respective list.

Use drag & drop to change the order of the columns.

Filter lists

You can add combinable filters via the Filter menu.

Use the filter bar to temporarily disable or remove filters.

Actions

The device lists allow you to open selected actions such as opening a dashboard template or device configuration (provided that the respective device supports configuration via the GridVis web interface)