

Manual

Licensing



Table of Contents

- 1 1. GENERATE AND SAVE LICENSE REQUEST FILE3
- 2 LICENSE SERVER.....6
- 3 IMPORT THE ACTIVATION FILE 12
- 4 SUMMARY 15

These instructions show you how to activate your GridVis license and how to license GridVis installations.

Content:

- ▪ Licensing the GridVis Desktop
- ▪ Logging onto the license server
- ▪ Activating a new edition (license package)
-

When you purchase a GridVis edition (Professional, Service or Ultimate), you receive a license to activate your GridVis installations. Depending on the edition, you can activate a different number of installations.

After activating a license in the license manager, you have one year to install newer versions of the licensed component for free (update period). You can continue to use the already activated version free of charge after the update period has expired.

To license a new version of the component after the update period has expired, you can purchase an extension of the update period. It is always valid for one year. This extension is valid from the last day of the last valid update period.

Example:

You would like to activate a GridVis 7.3 installation in September 2018 with the GridVis service license 12970 from figure 1.

The update period of this license expired on August 18, 2016. You can continue using installations up to version 7.1 with this license. As of version 7.2, which was released after the update period expired, the update period must be extended.

You need 3 update periods to cover September 2018:

- 1. Period until August 18, 2017
- 2. Period until August 18, 2018
- 3. Period until August 18, 2019

Lizenz Übersicht

Lizenz 12970
Edition SERVICE
Update Zeitraum endete am 18. August 2016

Lizenz Upgrade
Lizenz Verlängerung
Neue Installation hinzufügen

Installierbare Versionen: ● 7.4.x ● 7.3.x ● 7.2.x ● 7.1.x ● 7.0.x ● 6.0.x

Bislang keine Installationen.

Lizenz 13672
Edition ULTIMATE
Update Zeitraum endet am 8. November 2019

Lizenz Upgrade
Lizenz Verlängerung
Neue Installation hinzufügen
Aktivierungsdateien neu senden

Installierbare Versionen: ● 7.4.x ● 7.3.x ● 7.2.x ● 7.1.x ● 7.0.x ● 6.0.x

Desktop-Installationen (2 von 5):


ID	Installiert am	Benutzereingabe	E-Mail Endbenutzer	?	Löschanforderung ?	Actions
13672-38678	20. Dezember 2016	PC160	keine - Zum Setzen klicken			Herunterladen
13672-41949	24. Mai 2017		keine - Zum Setzen klicken			Herunterladen

Server- Installationen (2 von 2):


ID	Installiert am	Benutzereingabe	E-Mail Endbenutzer	?	Löschanforderung ?	Actions
13672-47529	15. März 2018	PC160_energie	keine - Zum Setzen klicken			Herunterladen
13672-41950	24. Mai 2017	NB24	keine - Zum Setzen klicken			Herunterladen

Fig. 1: License package with expired update period

1 1. Generate and save license request file

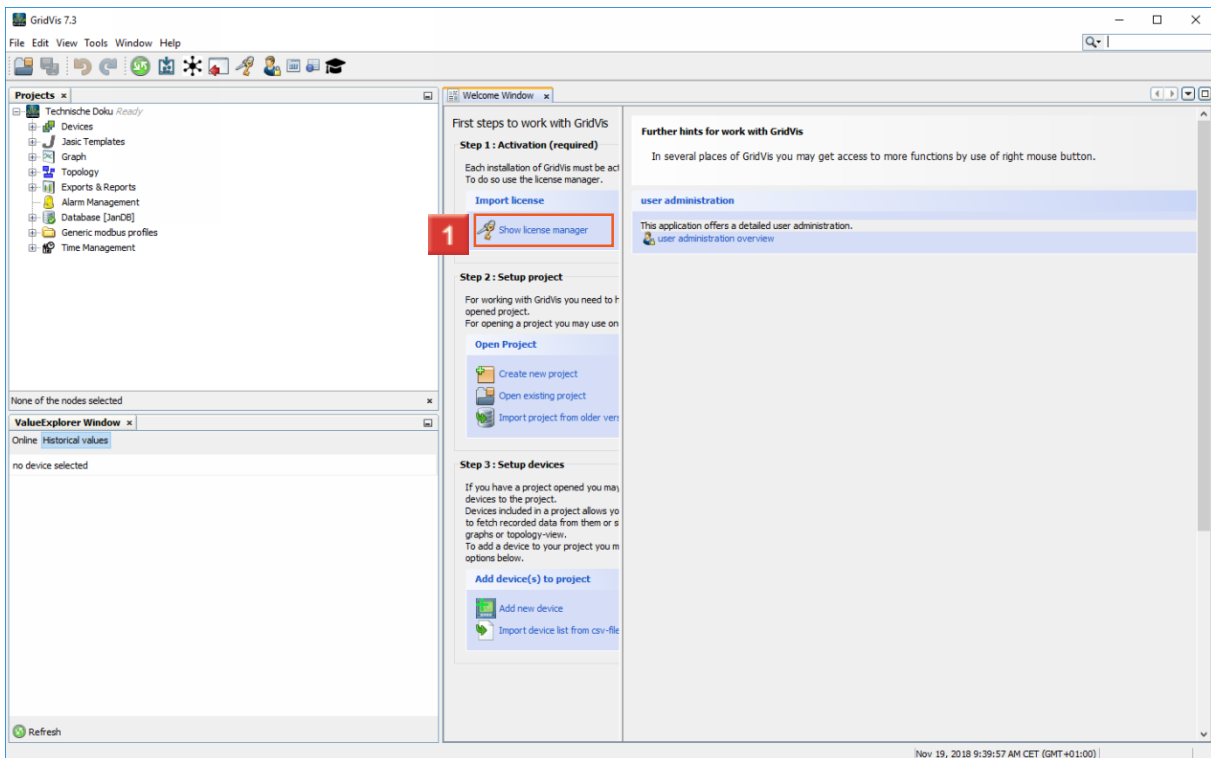

1 Click the **Show license manager** button.

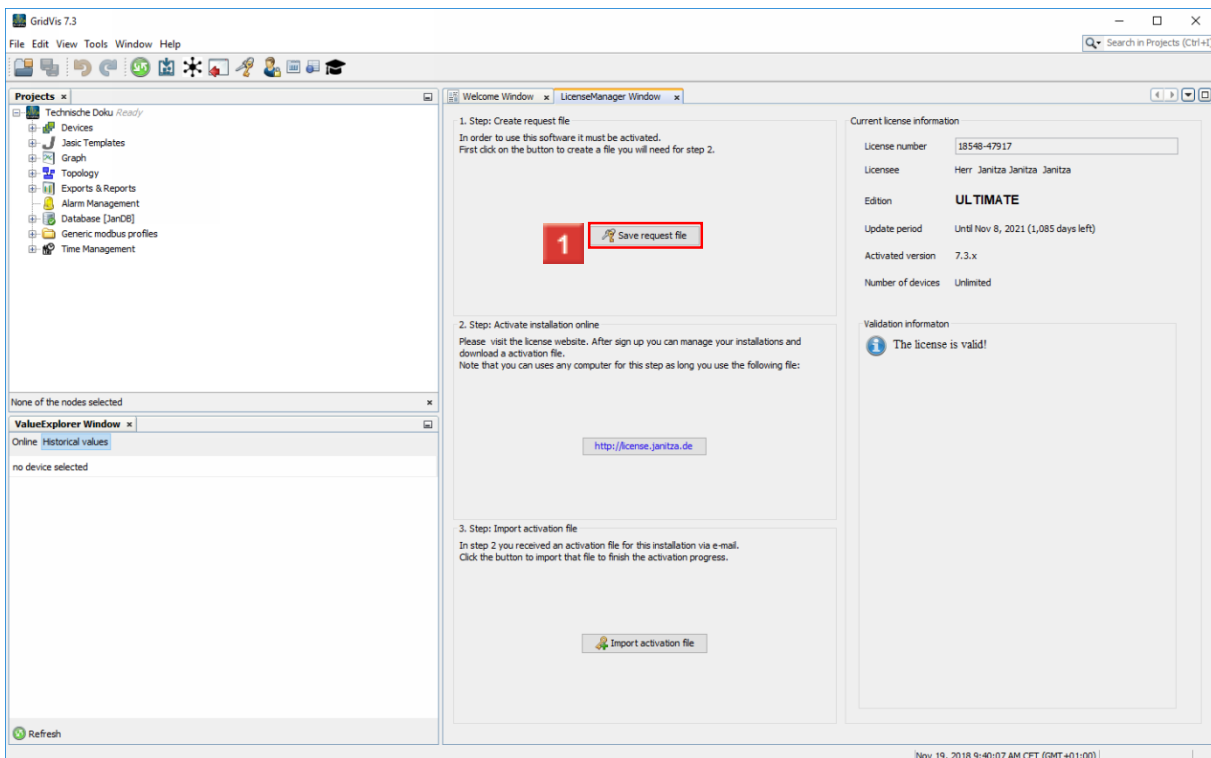

1 Click the **Save request file** button.

Generate request file

Steps

1. **Enter custom Text**
2. Select request file


Enter custom Text

Custom Text

Text to identify your installation(can be empty).

< Back **1** Next > Finish Cancel Help


- 1** Enter the name (file name) in the **Custom text** input field.
Click the **Next** button.

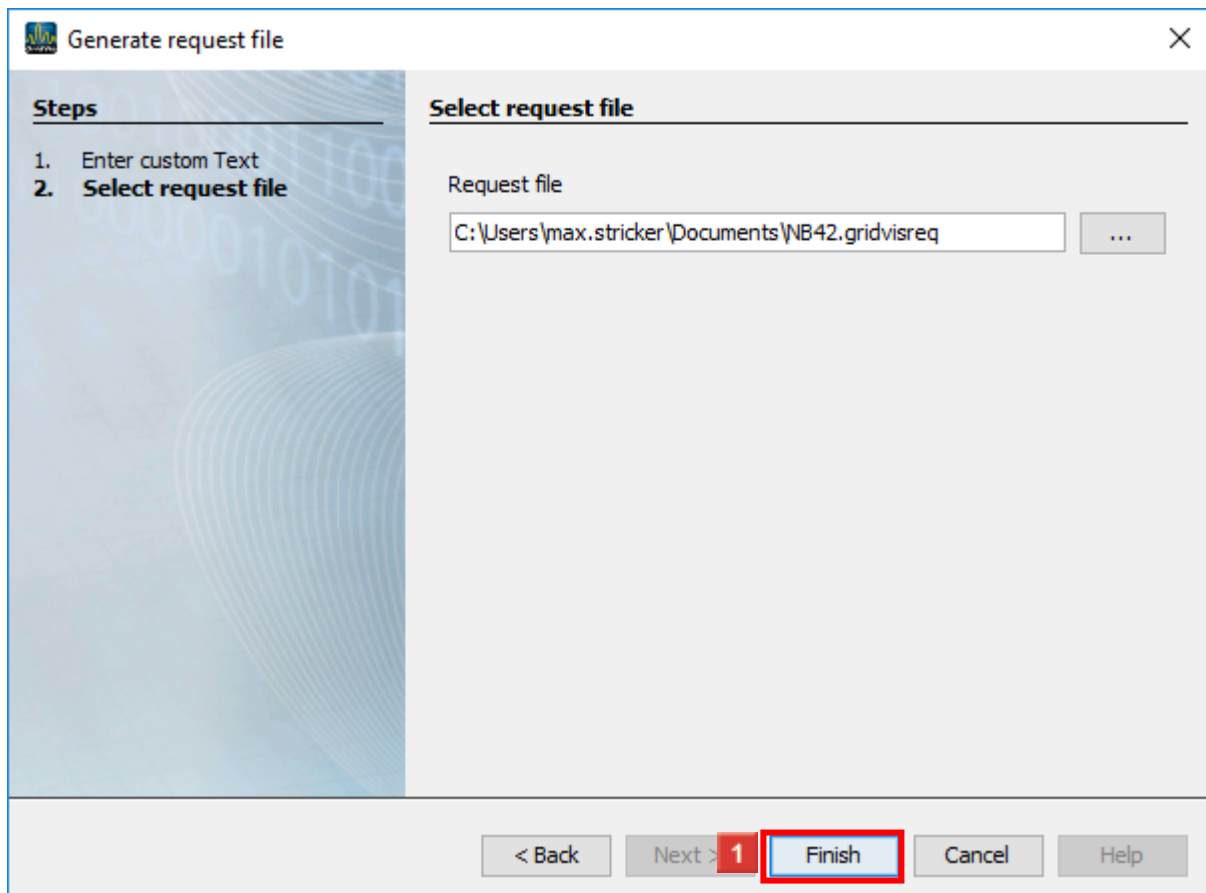

1 Click the **Finish** button.


i If you want to activate a GridVis installation on a system without an Internet connection, save the request file on a removable storage medium.

2 License server

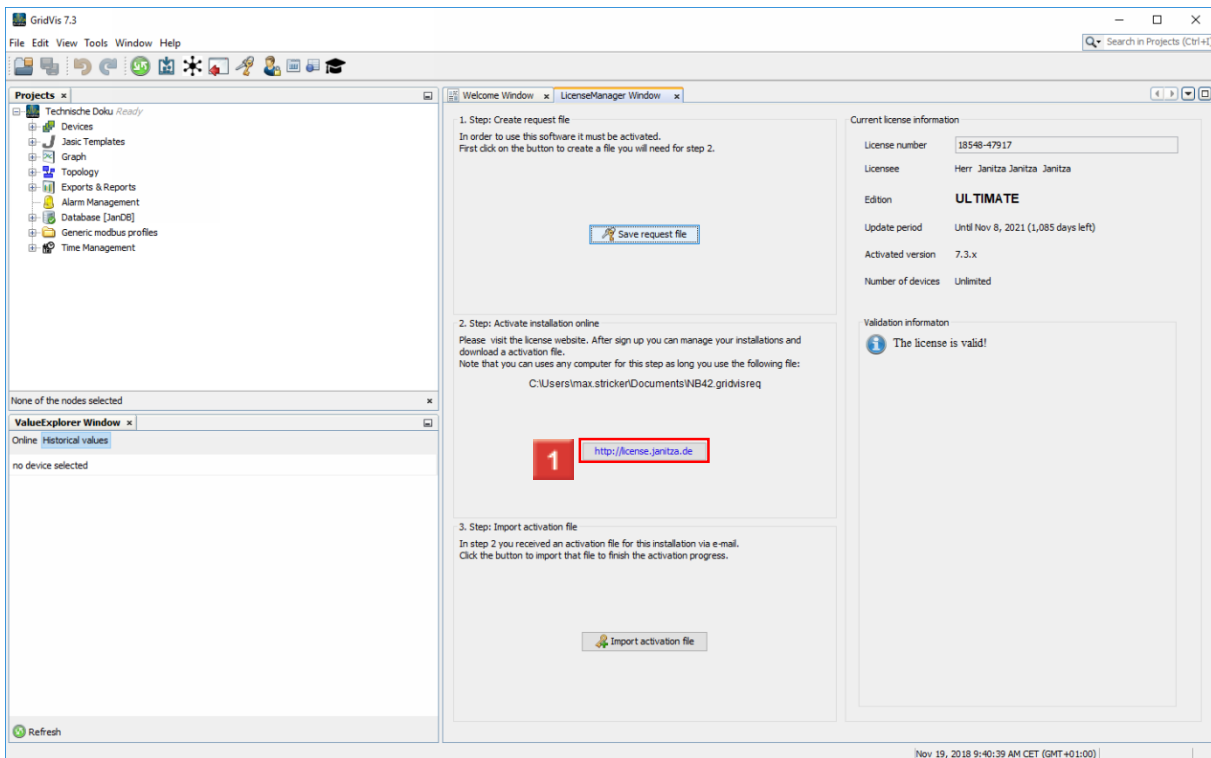


1 Click the <http://license.janitza.de> hyperlink.

i If necessary, switch to a system with Internet access for the next steps.

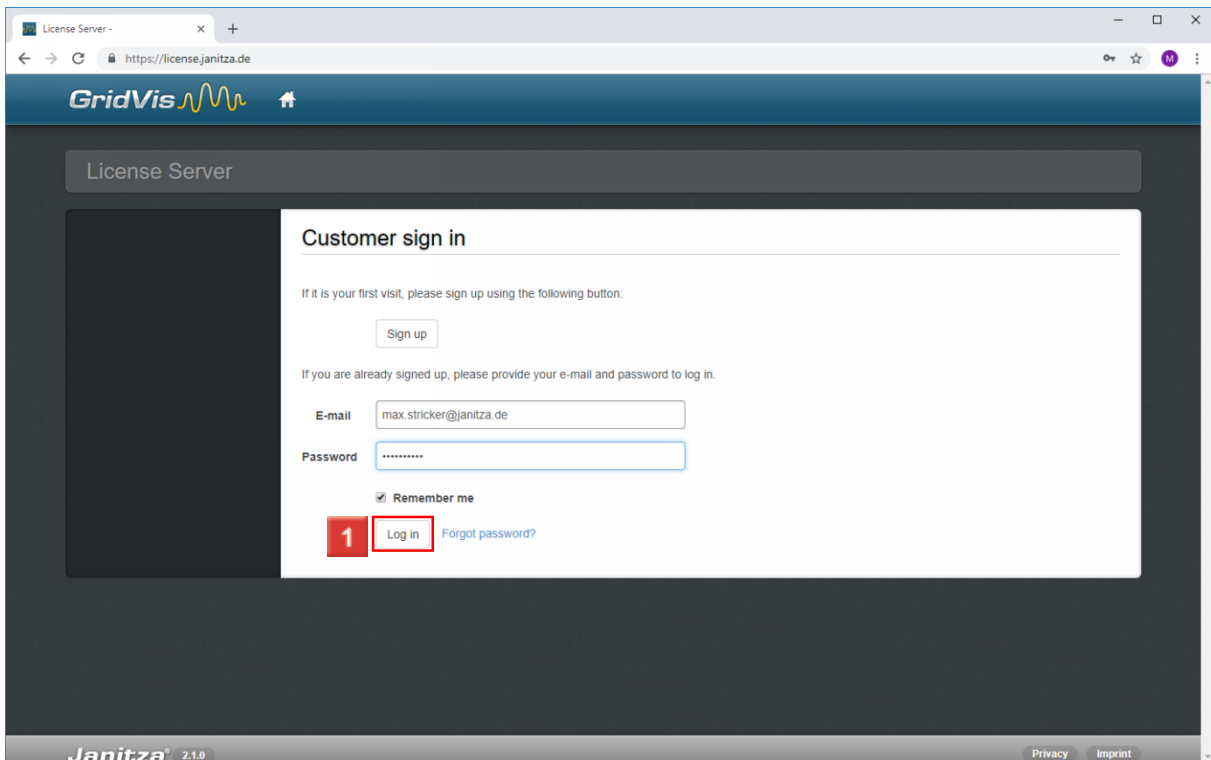


1 Enter your login data in the corresponding input fields and click the **Log in** button.

If you do not yet have a customer account, click **Sign up** to create one.

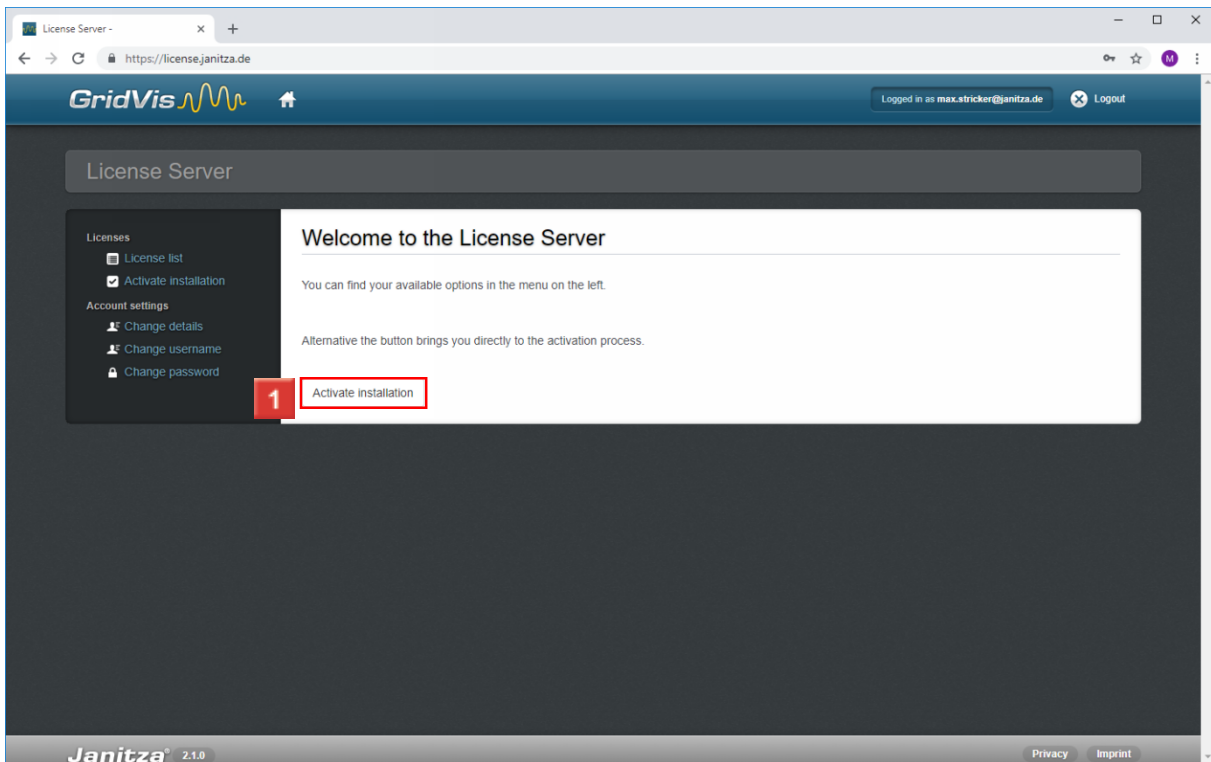

1 Click the **Activate installation** button.

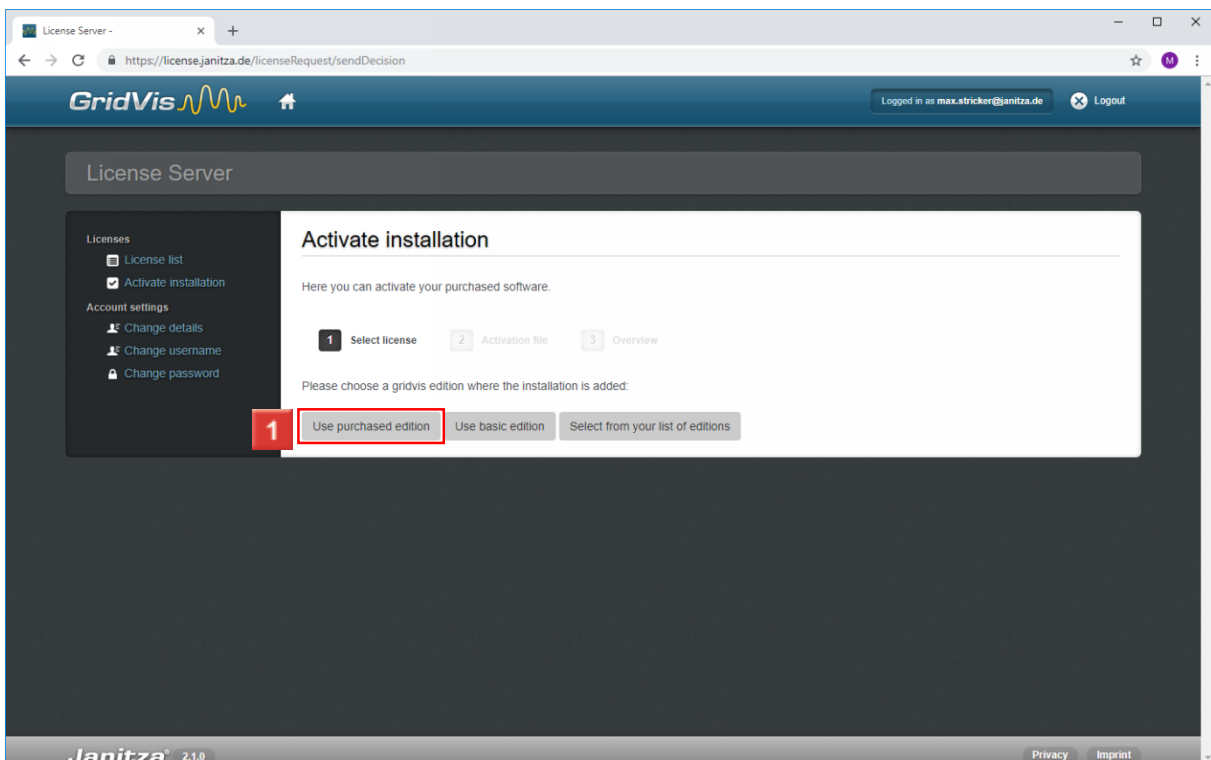

1 If you still have free licenses available, you can activate the installation on one of these licenses here.

Click the **Use purchased edition** button.

i As soon as you activate your license with this step, the update period begins.

Smart Energy &
Power Quality Solutions

Janitza

Datum: 09.10.20

Seite 2 von

Lieferschein Nr. 18-517760

- Geräte Übersicht
- Bild Manager
Zolltarifnummer: 85234910
Ursprungsland: Deutschland

Seriennr.
XXXX-XXXX-XXXX-XXXX

Versand per E-Mail

Lieferbedingung: frei Haus innerh. Deutschland - CPT [INCOTERMS2010]

Rücknahme und Stornierung von kundenspezifischen Artikeln (Artikel die nicht im Katalog gelistet sind) und Software sind grundsätzlich ausgeschlossen.

Es gelten für alle unsere Lieferungen ausschließlich die jeweils gültigen „Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie (ZVEI)“ zuzüglich der Ergänzungsklausel „Erweiterter Eigentumsvorbehalt“. Sollten Ihnen die Lieferbedingungen nicht vorliegen, senden wir Ihnen diese gerne auf Anforderung zu.

Vertriebsinnendienst:

Vertriebsgebiet:

Tel:

E-Mail:

Vertriebsaußendienst:

Name:

E-Mail:


Janitza electronics GmbH
Vor dem Polstück 6
D-35633 Lahnau
Telefon: +49 6441 9642-0
Support: +49 6441 9642-22
Telefax: +49 6441 9642-30

Warenanlieferung:
Janitza electronics GmbH
Vor dem Polstück 1
D-35633 Lahnau


Internet: www.janitza.de
E-Mail: info@janitza.de
Geschäftsführer: Markus Janitza
HRB 928 Wetzlar
USt.-IdNr.: DE112616565

Sparkasse Wetzlar
BIC/Swift Code:
HELADEF1WET
IBAN:
DE46 5155 0035 0028 0013 60

Commerzbank G
BIC/Swift Code:
COBADEFFXXX
IBAN:
DE19 5134 0013 00

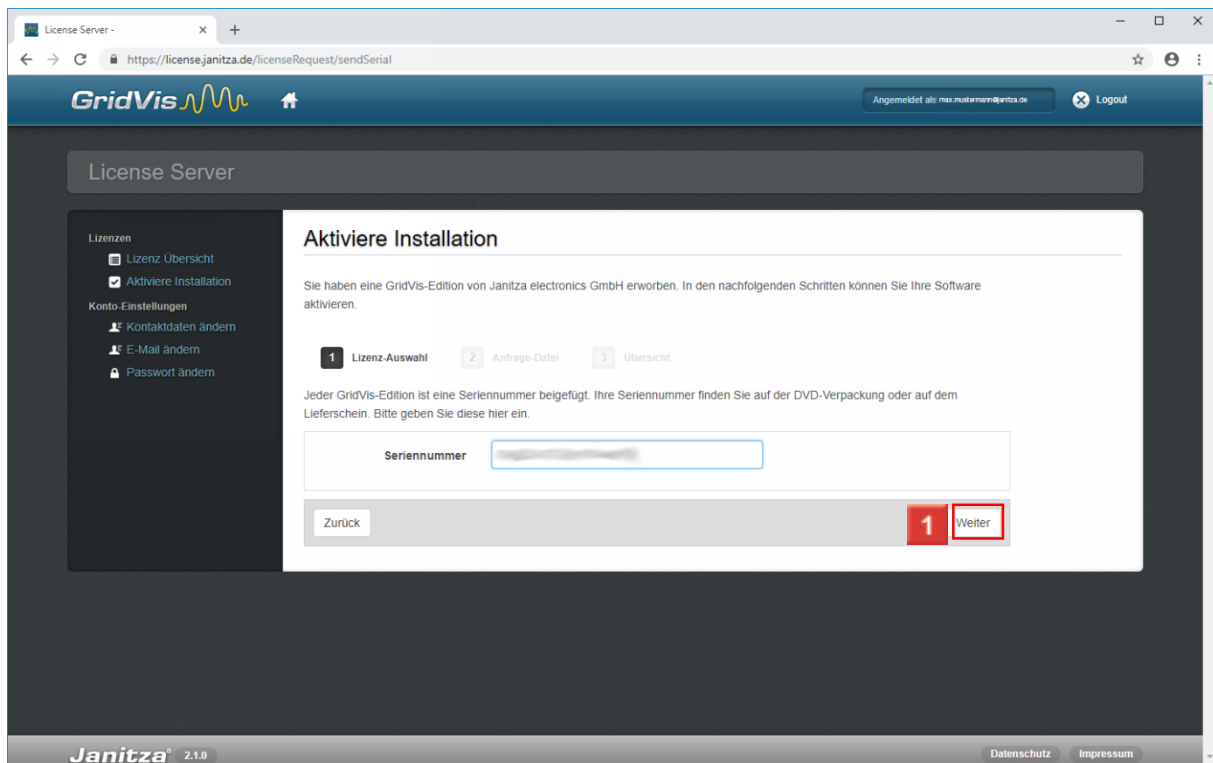


1 After you have entered the serial number in the **License key** input field, click the **Next** button.

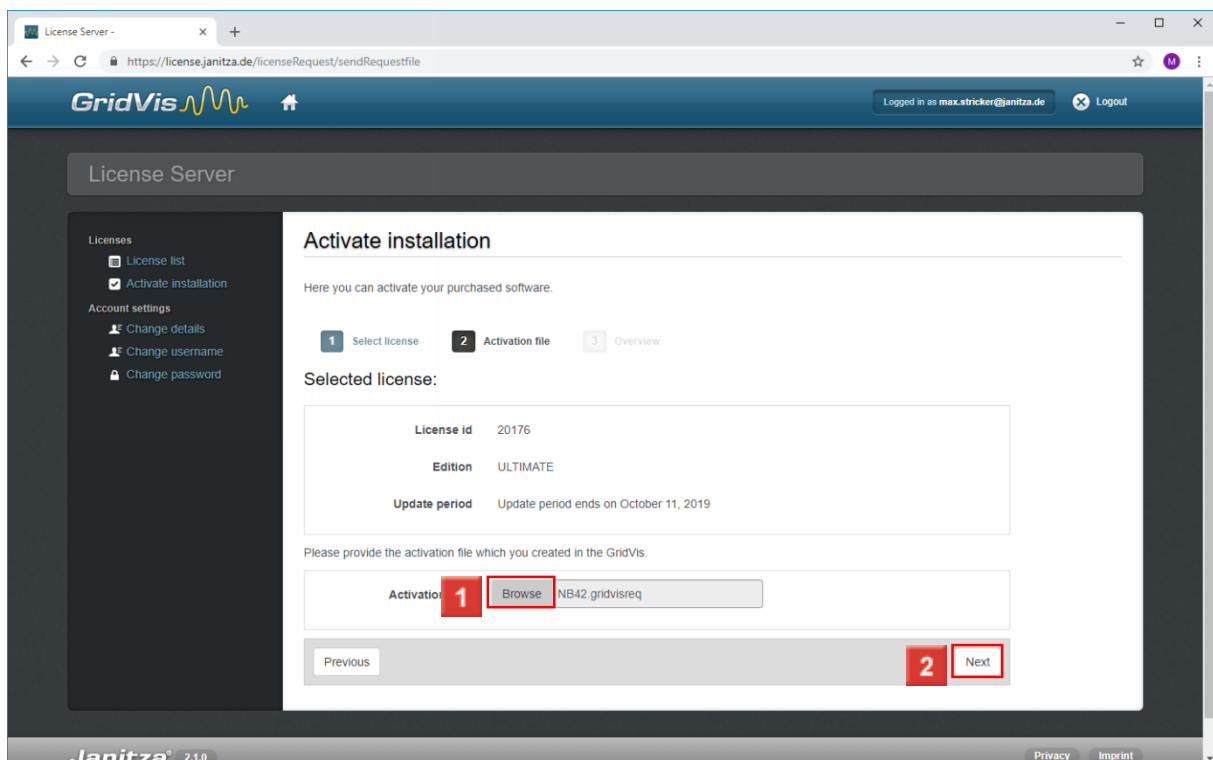


1 Click the **Browse** button and in the next step, select the previously created license activation request file.

2 Click the **Next** button.

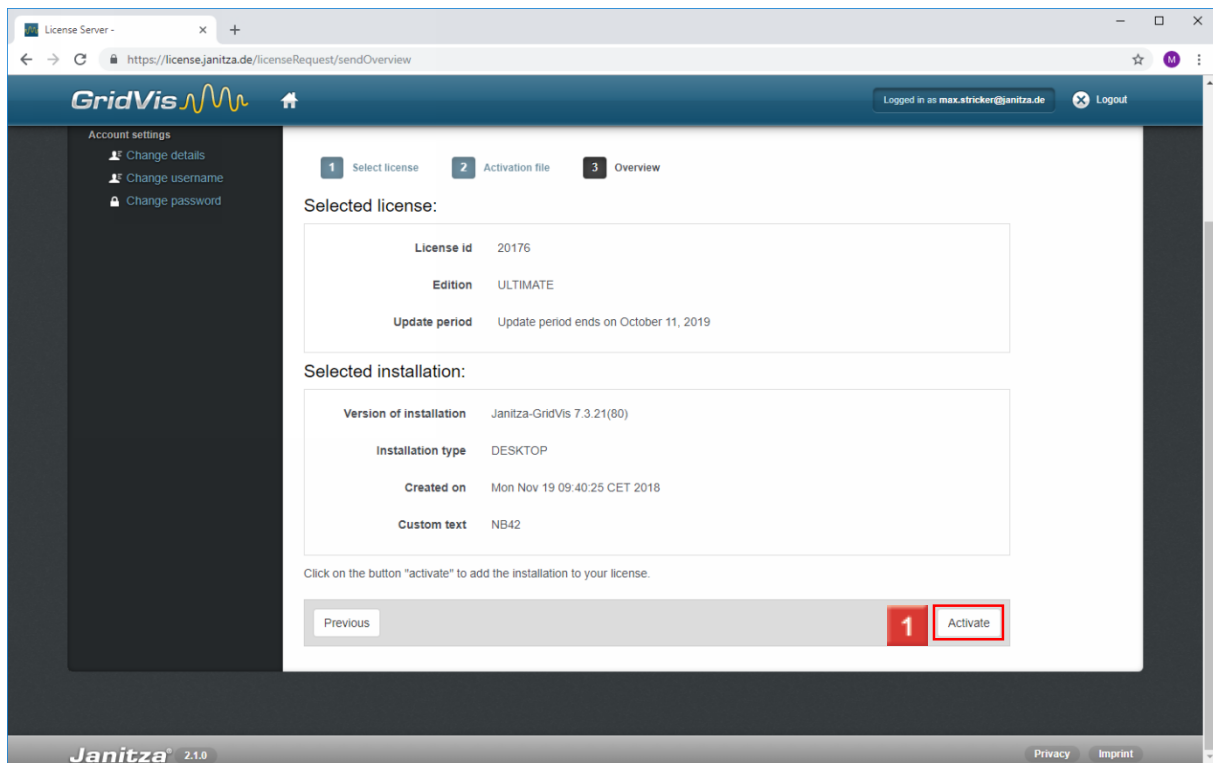


1 Click the **Activate** button.

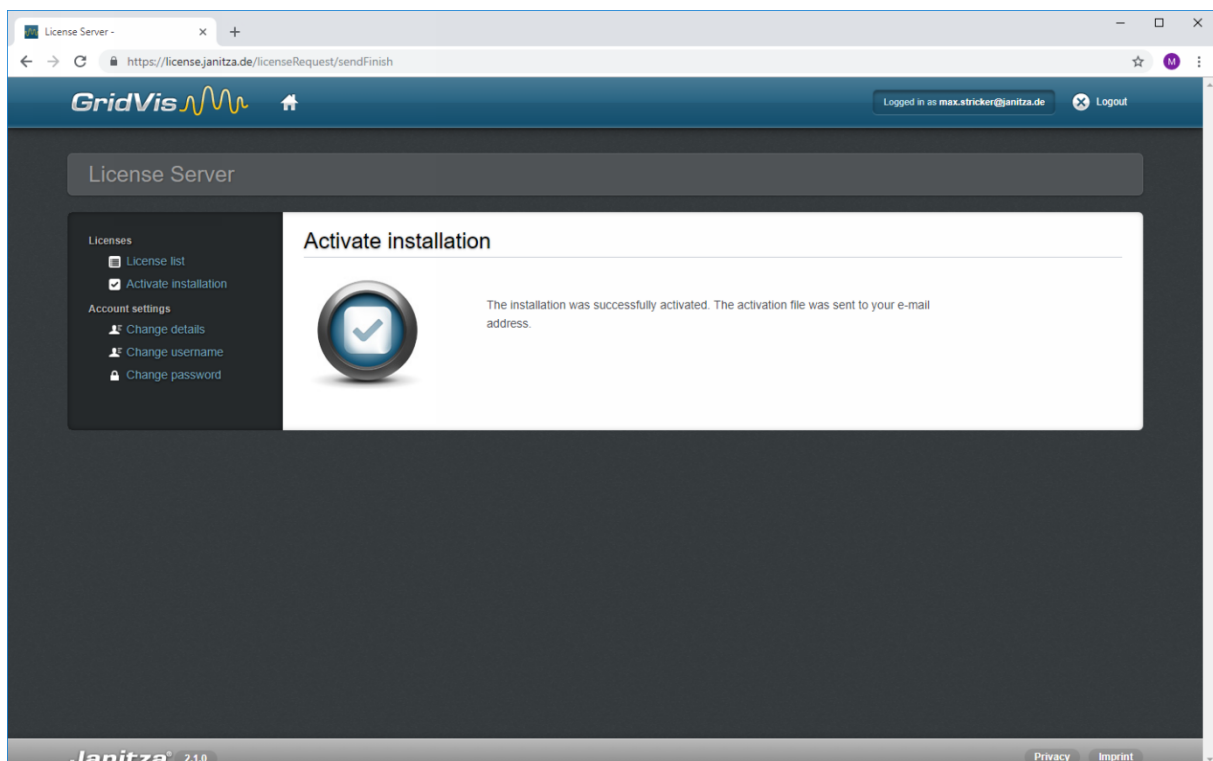


1 Retrieve your e-mails and save the activation file sent to you.

To complete the activation, switch to your GridVis installation.


3 Import the activation file

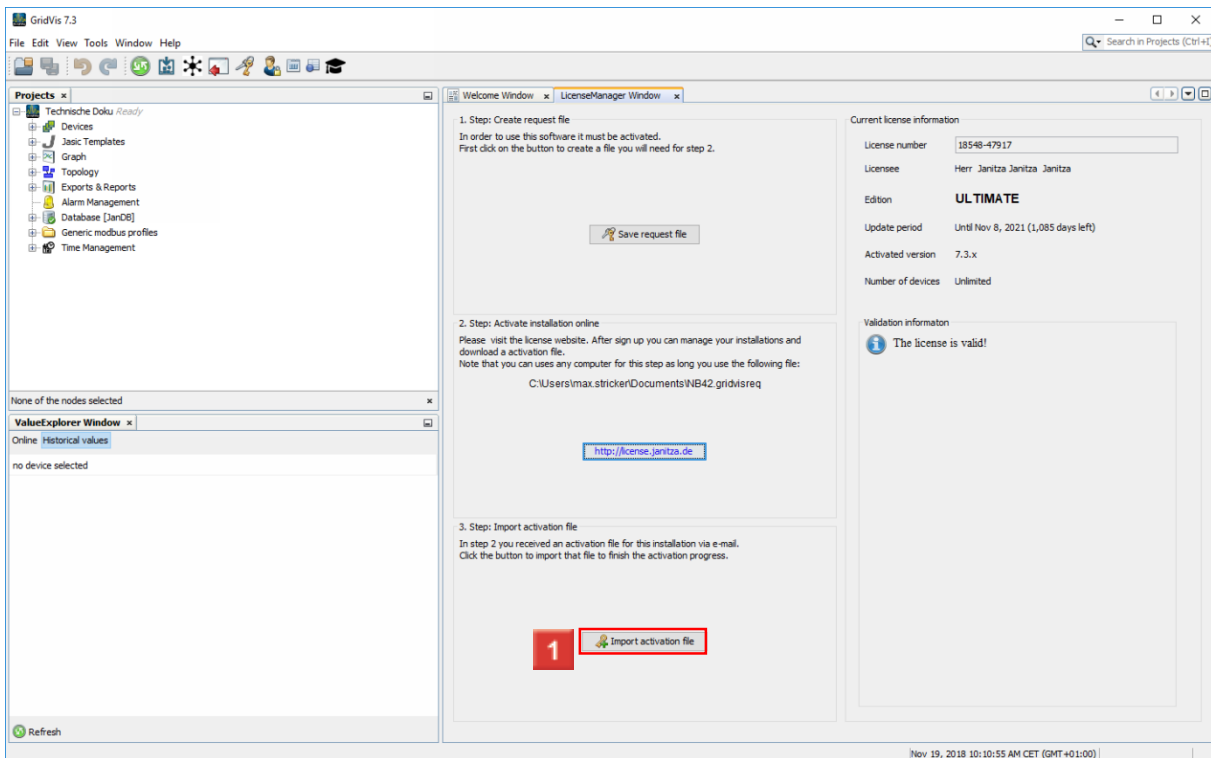


1 Click the **Import activation file** button.

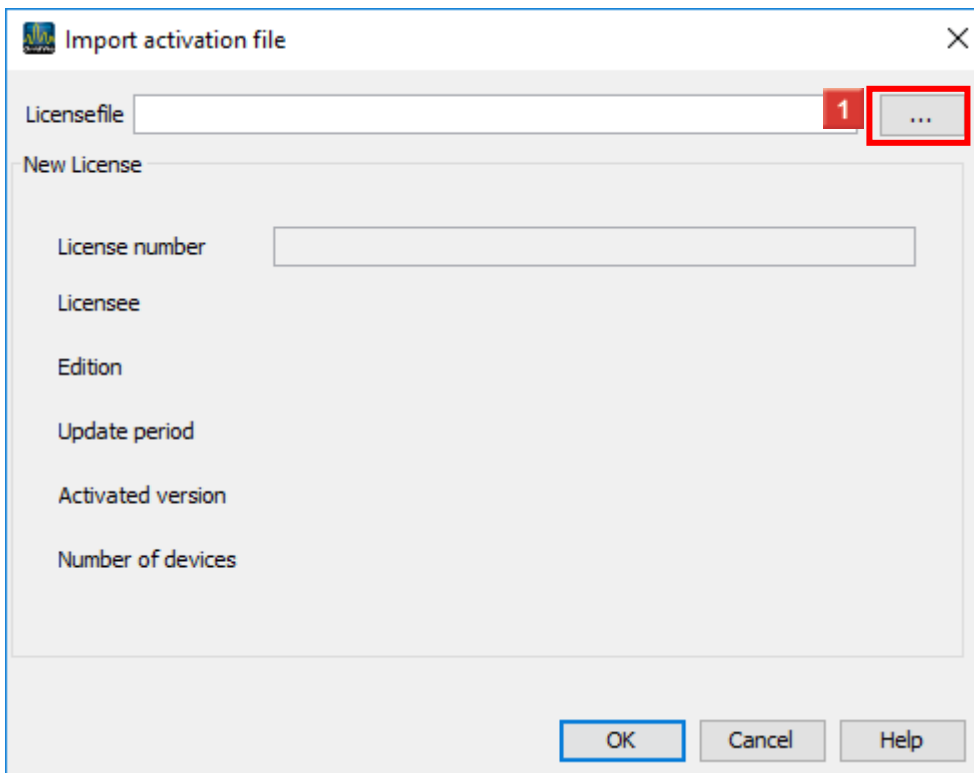


1 Click the ... button.

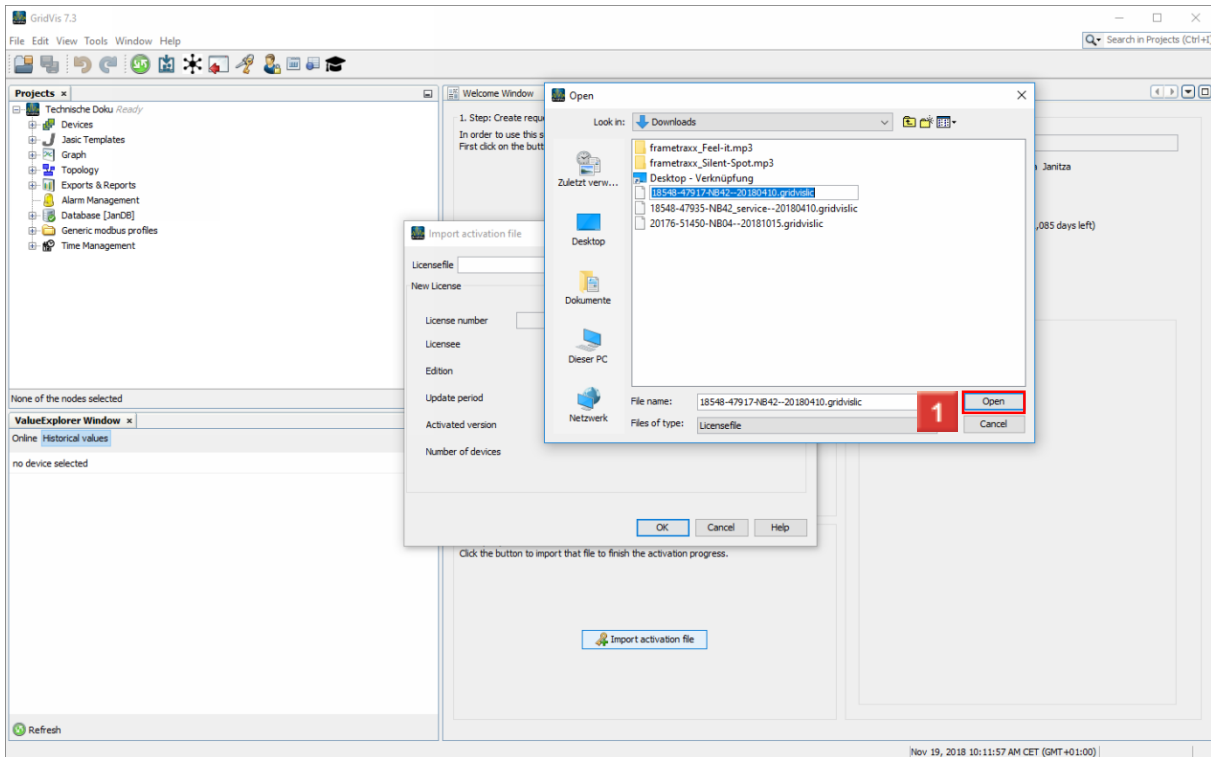

1 Select the downloaded activation file and click the **Open** button.

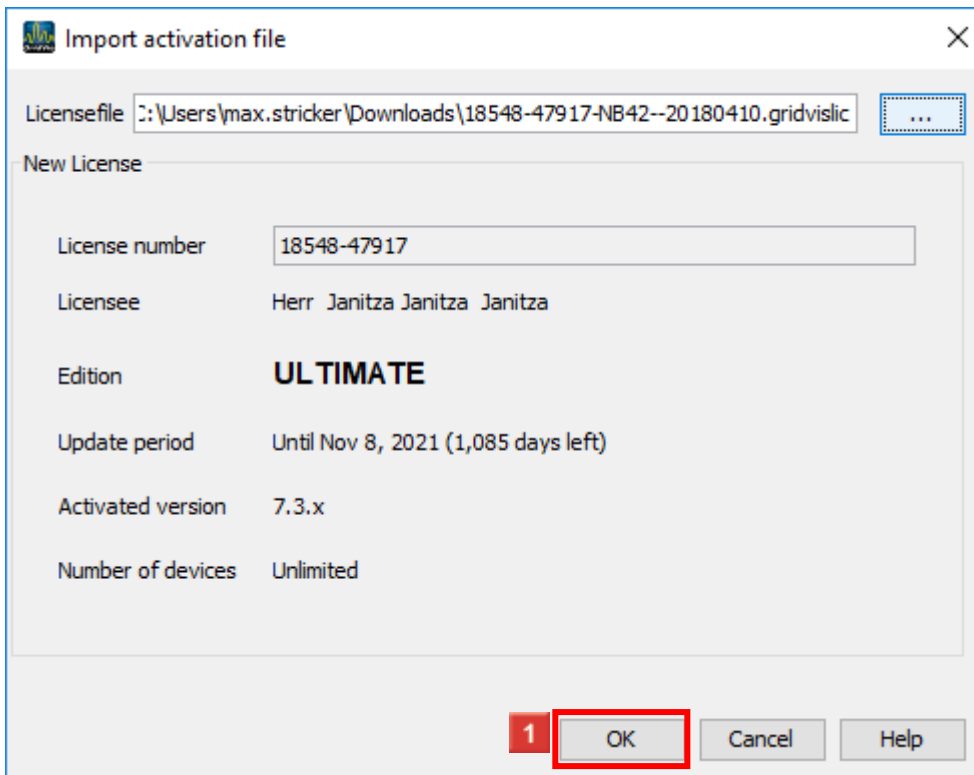

1 Click the **OK** button.

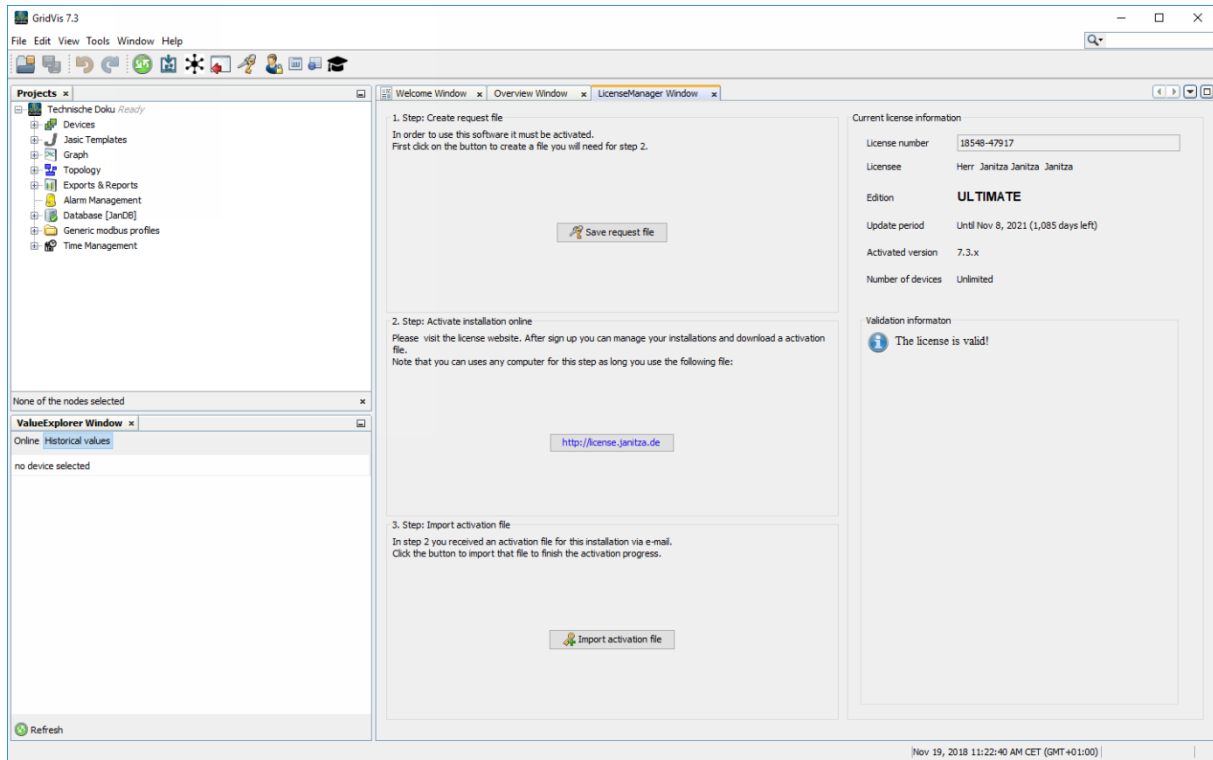

4 Summary

Please enter your text here.

Licenses

You can purchase licenses for the GridVis editions Professional, Service and Ultimate.

Depending on the edition, you can activate a different number of installations.

Update period

After activating your license, you have one year to activate current versions of the licensed component.

You can purchase extensions for this period for one year at a time.

Such an extension is always valid from the last day of the last valid update period.

License server

To activate and manage your licenses, log in to the Janitza License Server with your customer account.

There you have an overview of all your activated licenses, their update period and the number of GridVis installations that have already been activated.

You can find more information about the license server [here](#).

GridVis-Komponente	Professional	Service	Ultimate
Desktop	3	5	5
Dienst / virtueller Server	0	2	2